

THE HOM STUDY OF CESR RF CAVITIES USING SINGLE CIRCULATING BUNCH *

A. Temnykh¹, D. Hartill, S. Belomestnykh¹ and R. Kaplan
Laboratory of Nuclear Studies Cornell University, Ithaca NY 14953, USA

Abstract

The CESR RF system consists of four 5-cell RF cavities [1]. Each cell has a field probe sensitive to the voltage in the cell. We used a single bunch circulating in the ring as the driving current which gives a well known spectrum. The signals from the field probes were analyzed and we were able to identify the peaks seen in the spectra as higher-order modes (HOMs) that are excited by the beam in RF cavities. Analysis of the peak shapes and location gave us the Q factors of parasitic modes and their frequencies. The reliability of data was verified with direct measurement using a Network analyzer. The information about Q s and frequencies of the parasitic modes will be used for the multi-bunch beam stability analysis.

1 INTRODUCTION

It was found that the maximum beam current at CESR is limited by the multi-bunch beam instability. The appearance of this instability is seen as the self-excited lines in the spectra of the signals picked up from BPM buttons. To determine which of CESR elements are responsible for that we performed the following experiment. Keeping beam current constant we changed the temperature of one of the CESR RF cavities at a time and observed the amplitude of the self-excited line in the spectrum (see [2]). The cavity temperature variation causes the small profile distortion leading to the frequency shift of the cavity HOMs. The frequency of the fundamental mode is kept in place by the tuner, but the frequencies of all other modes can be shifted unpredictably. If the frequency of one of those HOMs will appear in the vicinity of the lines presented in the spectrum of the beam current, it may result in high parasitic voltage in cavity which may drive the beam instability. The mode voltage is proportional to the beam current and depends on the quality factor Q and the mode specific impedance R/Q . While R/Q for each mode can be calculated, the reliable value of Q s and frequencies can be obtained only from measurements. To obtain this information for the cavities presently installed in the ring we directed experiments described below. Obtained data will help us to analyze multi-bunch beam instability and make a proper choice for the beam current increase strategy.

2 HIGHER ORDER MODES IDENTIFICATION

The CESR RF system consists of four 5-cell RF cavities. Two of them, E1 and E2, are located in the east side of the

ring and two others, W1 and W2, are in the west side. Each cell has a field probe sensitive to the voltage in the cell. We analyzed the signals from these probes in our experiments. To excite higher-order modes we used a single bunch circulating in the ring which gives us simple spectrum of driving current. This spectrum contains all harmonics of the revolution frequency, $f_0 = 390.13kHz$. The harmonic strength depends on its frequency, f , as $exp(-f^2/(2f_c^2))$, where $f_c \sim 3GHz$ is determined by the bunch length. Figure 1 shows spectra of a signal picked from the field probe of the E1 cavity cell number 4. The circulating current was 6 mA in a single positron bunch. The first plot, marked as

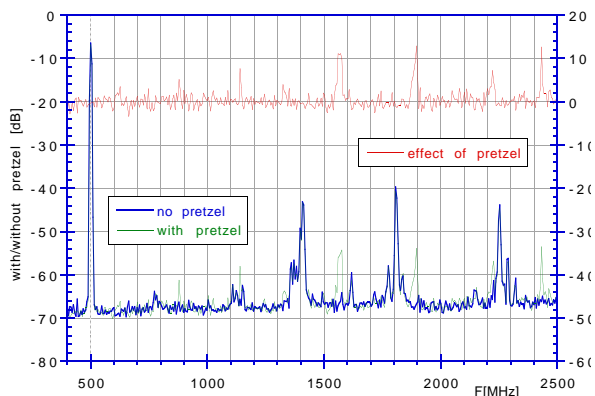


Figure 1: Spectra of signal from field probe of E1 cavity cell 4.

“no pretzel”, is the spectra obtained with the beam orbit close to the cavity axis. We can expect excitation of only longitudinal HOMs in this case. The second spectrum, labeled as “with pretzel”, is for the pretzelized orbit, i.e. the beam orbit was shifted by approximately 10 mm off the axis in horizontal plane. One can see that additional peaks appear which may be interpreted as the excitation of the dipole modes. The bottom plot, “effect of pretzel”, is the result of subtraction of the first spectrum from the second one.

The next step was to identify peaks seen in spectrums with calculated higher-order modes. The URMEL calculations were done for the single-cell. Table 1 shows the calculated characteristics of longitudinal modes found by URMEL in the frequency range from $500MHz$ to $2.5GHz$. It contains frequencies and R/Q s. The measured spectrum for the on axis beam orbit is shown in figure 2. Dots represent calculated HOMs. We used the logarithm of the ratio of a mode R/Q to the fundamental mode R/Q

* Work supported by the National Science Foundation

¹On leave from BINP, Novosibirsk

Num	Type	f [MHz]	$R/Q[\Omega]$	seen in spectra
1	TM0-Ex-1	498.16	132.47	yes
2	TM0-Mx-1	773.52	25.645	yes
3	TM0-Ex-2	1125.4	1.6010	yes
4	TM0-Ex-3	1351.4	6.0730	yes
5	TM0-Mx-2	1401.8	12.578	yes
6	TM0-Ex-4	1750.5	5.0770	yes
7	TM0-Mx-3	1791.5	4.9880	yes
8	TM0-Ex-5	1961.0	0.0170	no
9	TM0-Mx-4	2146.0	0.5930	?
10	TM0-Ex-6	2228.7	3.4640	yes
11	TM0-Mx-5	2274.2	1.2160	yes

Table 1: List of longitudinal modes found by URMEL between 500 MHz and 2.5 GHz.

Num	Type	f [MHz]	$R/Q[\Omega]$ @4.4cm	seen in spectra
1	1-Mx-1	747.19	0.77700	
2	1-Ex-1	871.35	17.696	yes
3	1-Mx-2	1138.8	24.971	yes
4	1-Ex-2	1225.8	0.014000	
5	1-Mx-3	1327.6	0.91400	yes
6	1-Ex-3	1500.5	0.87600	
7	1-Mx-4	1562.2	19.187	yes
8	1-Ex-4	1621.8	0.57700	
9	1-Ex-5	1749.8	0.18100	
10	1-Mx-5	1879.8	6.5990	yes
11	1-Ex-6	1885.6	19.667	yes
12	1-Mx-6	1948.8	0.061000	
13	1-Mx-7	2046.4	0.91400	
14	1-Ex-7	2196.6	3.0320	yes
15	1-Mx-9	2223.9	2.7300	yes
16	1-Ex-8	2264.4	0.63000	

Table 2: List of dipole modes found by URMEL between 500 MHz and 2.5 GHz.

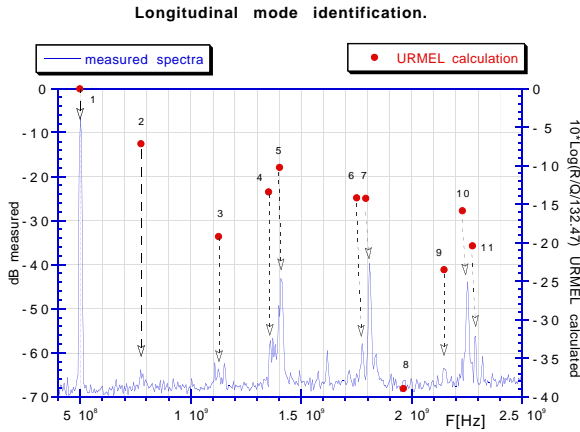


Figure 2: Longitudinal modes identification.

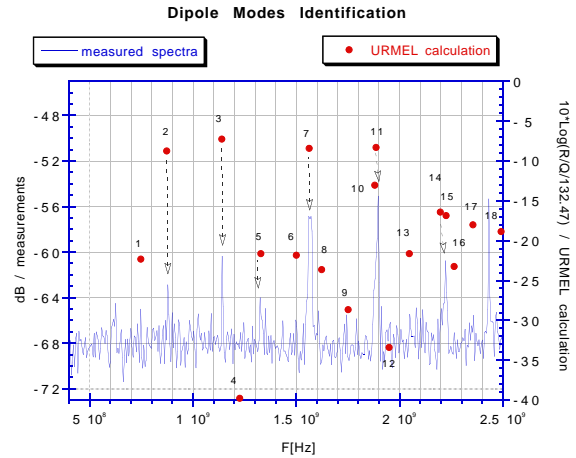


Figure 3: Dipole modes identification.

for the vertical positioning the dots. It gives us a sense of the relative mode strength.

There is no doubt that the peaks in the spectra are related to the higher-order modes and we can say with certain which mode is responsible for the appearance of which peak. Note that the field probe sensitivity is different for different modes. It depends on the probe location and on the mode field pattern. The mode with the higher voltage may give the peak with smaller amplitude than the other one with the lower voltage. So, it would be wrong to compare measured peaks amplitude with calculated R/Q .

The same procedure was done for the dipole modes. Figure 3 shows the difference between two spectra, with and without pretzel. Here, also, one can see correlation between peaks and dots representing calculated HOMs, (see Table 2). So we again are able to say which peak corresponds to which mode.

The next step was to study the characteristics of higher-order modes needed for multi-bunch beam stability analysis.

3 HOM CHARACTERISTICS STUDY

Figure 4 shows a spectrum of signal from the E1 cell 4 field probe in a ± 3.5 MHz frequency range around 1801.5 MHz. We know from the previous measurements that here is a peak caused by the TM0-Mx-3 mode excitation. The form of the spectrum seen in figure 4 reflects the spectrum of driving current as well as shape of the resonance. As far as we used a single circulating bunch, its spectrum has lines at harmonics of the revolution frequency. The envelope of the spectrum is determined by the TM0-Mx-3 mode parameters. This envelope was fitted with the theoretical resonant function using the resonant frequency f_m and the quality factor Q as free parameters. The best fitting was obtained with $Q = 15,853 \pm 9,000$ and $f_m = 1801.4$ MHz. One can see relatively large uncertainty in Q . It occurs because

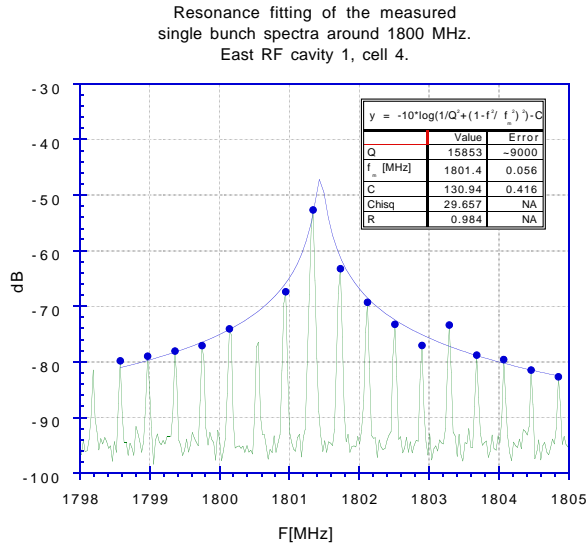


Figure 4: Resonance fitting of spectrum around TM0-ME-3 mode location. E1 cavity, cell 4.

the fitted points are sampled by the revolution frequency and in the case of high Q only few of them, which are close to the mode frequency, play role in the Q determination. In the case of low Q the number of points important for the Q determination is getting larger and the accuracy becomes better. The accuracy of the mode frequency fitting is always better than 0.1 MHz.

To verify these numbers we performed the direct measurements of the cell 4 of the E1 cavity using a Network analyzer. The higher-order mode probe [3] was used to drive field in the cell and field probe was used to pick up the signal. By measuring the S21 function we found the peak of the TM0-Mx-3 mode with $Q = 16,400$ and $f_m = 1801.563 MHz$. These numbers are in a good agreement with numbers obtained from the beam measurement. The CESR RF system contains a total of 20 accelerating cells. All of them have slightly different spectra, i.e. slightly different peak amplitudes and positions. It may be easily explained by the their mechanical differences. For the purpose of the muti-bunch beam stability analysis it is necessary to know the mode frequency and Q variation among the cells. Table 3 shows the result of analysis of two longitudinal modes, TM0-Mx-2 and TM0-Mx-3, for 12 cells. One can see that the TM0-Mx-3 mode has average frequency of 1803.2 MHz with $\pm 1.8 MHz$ rms. spread among the cells. Its average Q is about 11,000 with $\pm 7,000$ rms. The TM0-Mx-2 mode characteristics are $1406.41 \pm 1.94 MHz$ frequency and Q in a range from 400 to 3,000. Note that the TM0-Mx-2 modes have remarkably lower Q s than those of TM0-Mx-3.

4 CONCLUSION

Peaks seen in spectra of the signals from the RF field probes have been identified as higher-order modes excited by the

Cav/cell	TM0-Mx-2 mode		TM0-Mx-3 mode	
	f_m [MHz]	Q	f_m [MHz]	Q
E1/1	1405.3	485	1800.4	12300
E1/2	1409	507	1803.7	8922
E1/4	1404.9	1007	1801.4	24800
E1/5	1405.7	3168	1803	5302
E2/1	1404	506	1802	12484
E2/2	1410.2	2117.6	1806.5	5548
W1/1	1404.1	614	1801.3	9227
W1/2			1804.9	3535
W1/4	1406.1	613	1803.4	5736
W1/5	1407.3	1944	1804.2	3860
W2/1	1406.9	422	1803.8	18842
W2/2	1407	550	1803.5	20000
Average	1406.4	1085	1803.2	10879
RMS	1.9	914	1.7	7011

Table 3: Characteristics of the TM0-Mx-2 and TM0-Mx-3 modes.

beams. We measured Q factors and tunes of the TM0-Mx-2 and TM0-Mx-3 modes in 12 RF cells using a single circulating bunch as a driving current. This information will be used for multi-bunch beam stability analysis.

5 ACKNOWLEDGMENT

We wish to thank all people of the CESR operating group who assisted us in our measurements.

6 REFERENCES

- [1] *RF Cavity Design for High Current Operation of the Cornell Electron Storage Ring*, S. Greenwald, et al. Proceedings of the 1989 Particle Accelerator Conference, Chicago, IL, March 1989, Vol. 1, pp. 226-228
- [2] *CESR Elog: Machine Studies, CESR Impedance and Instabilities, Sept 17 1996*
- [3] *CESR RF System*, R. Sundelin, et al. IEEE Trans. on Nucl. Sci., Vol. NS-28, No. 3, Part 2, pp. 2844-2846 (June 1981).